



Level



Pressure



Flow



Temperature

Liquid  
Analysis

Registration

Systems  
Components

Services



Solutions

## Technical Information

# Flowfit CCA250

Flow assembly for chlorine and pH/ORP sensors



### Application

The flow assembly CCA250 has been specially designed to hold the chlorine resp. chlorine dioxide sensors CCS120, CCS140, CCS141, CCS240, CCS241 or CCS142D. Additionally there are two mounting positions for sensors with Pg 13.5 thread and 120 mm (4.72 inch) installation length, e.g. pH or ORP sensors.

Main areas of application are:

- Drinking water
- Washwater
- Process applications
- Swimming pool water

### Your benefits

- Needle valve to adjust the flow and flow meter for optical control
- Inductive proximity switch in combination with Liquisys M CCM223/253: a "Flow alarm" can be activated
- Potential matching pin for pH measurement
- Cap screwed from below allows calibration of the pH and ORP sensors without sensor removal

## Function and system design

### Measuring system

A complete measuring system comprises:

- Flowfit CCA250
- chlorine sensor, e.g. CCS142D
- Measuring cable, e.g. CYK10
- Transmitter, e.g. Liquiline M CM44

Optional:

- up to two pH sensors
- Junction box for cable extension, e.g. RM junction box

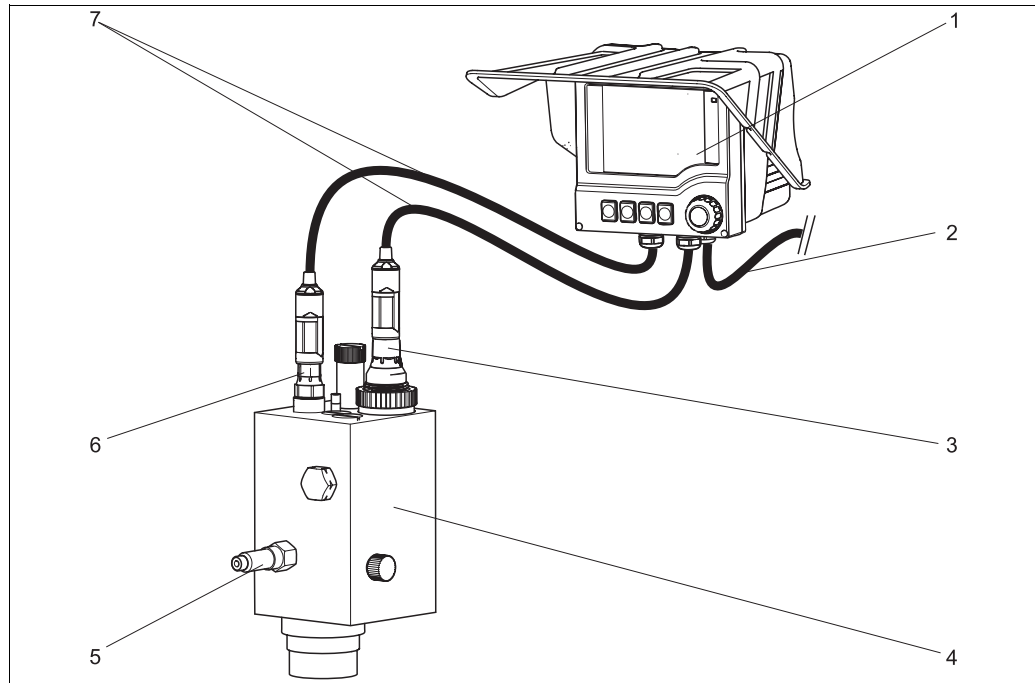



Fig. 1: Measuring system

- 1 Transmitter Liquiline M CM44 with weather protection cover
- 2 Supply line of the transmitter
- 3 Chlorine sensor CCS142D
- 4 Flowfit CCA250
- 5 Assembly inlet (outlet at backside, not to be seen in figure)
- 6 pH-Sensor CPS71D
- 7 Measuring cable CYK10

## Installation

### Installation instructions

To get a flow through the bypass, pressure  $p_1$  has to be higher than pressure  $p_2$ . Therefore, you have to install an aperture in the main conduit (→ , pos. 5).

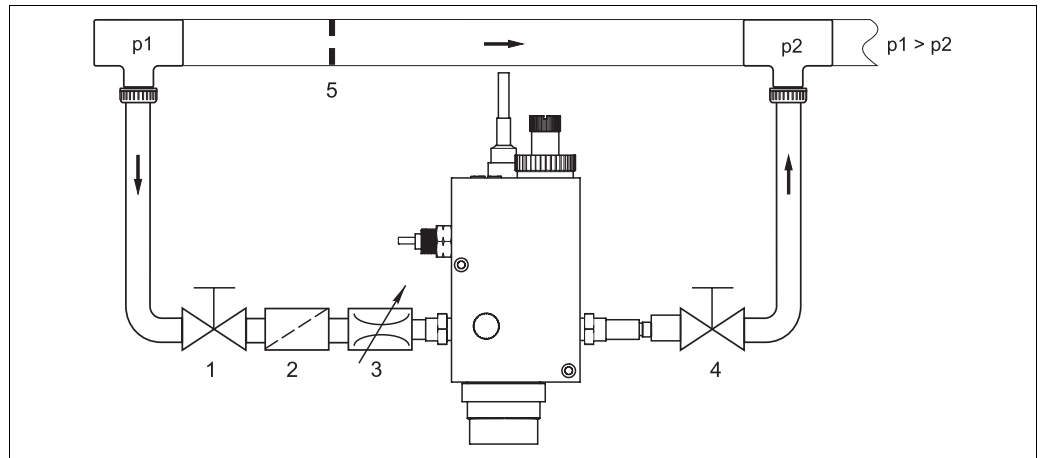


Fig. 2: Installation example with bypass and aperture in the main conduit

- 1 Stop valve (to be provided by customer)
- 2 Dirt trap (filter),  $d = 500 \mu\text{m}$  (to be provided by customer). Installation of dirt trap is mandatory!
- 3 Pressure reducer (with  $p > 4 \text{ bar}$  (58 psi))
- 4 Stop valve (to be provided by customer)
- 5 Aperture in the main conduit

In case of an open outlet installation, no pressure increasing procedure is needed (→ , 3).

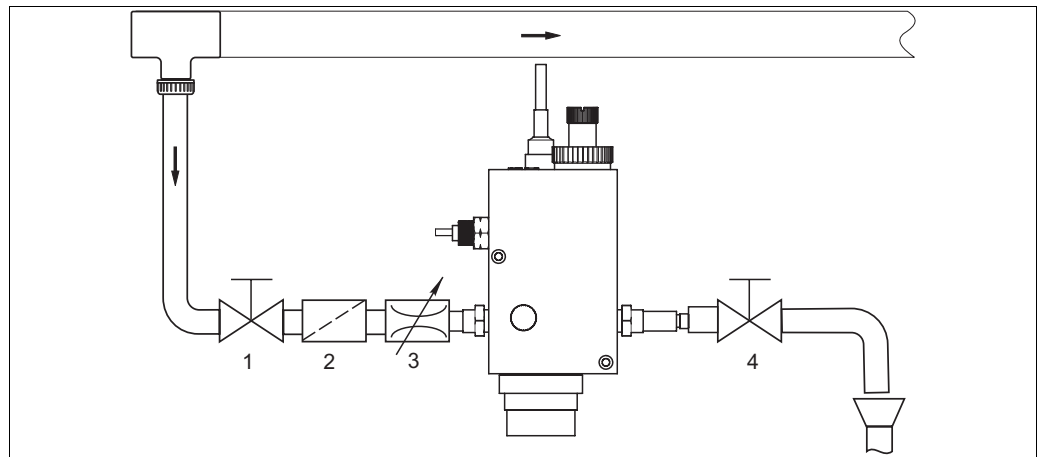



Fig. 3: Installation example with open outlet

Legend →  2

## Environment

**Ambient temperature range** 0 ... 50 °C (32 ... 120 °F)

**Storage temperature** 0 ... 50 °C (32 ... 120 °F)

## Process

**Process temperature range** 0 to 45 °C (32 to 110 °F), non-freezing

**Process pressure** max. medium pressure: 4 bar (58 psi) at 40 °C (104 °F)

### Temperature-Pressure diagram

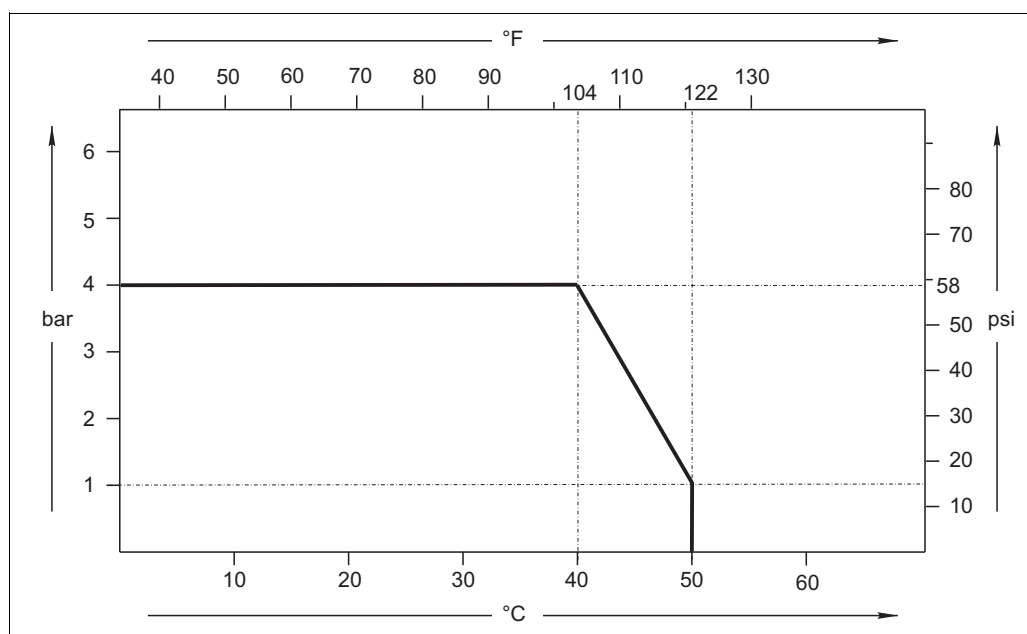


Fig. 4: Temperature-Pressure diagram

a0007413

## Mechanical construction

### Design, dimensions

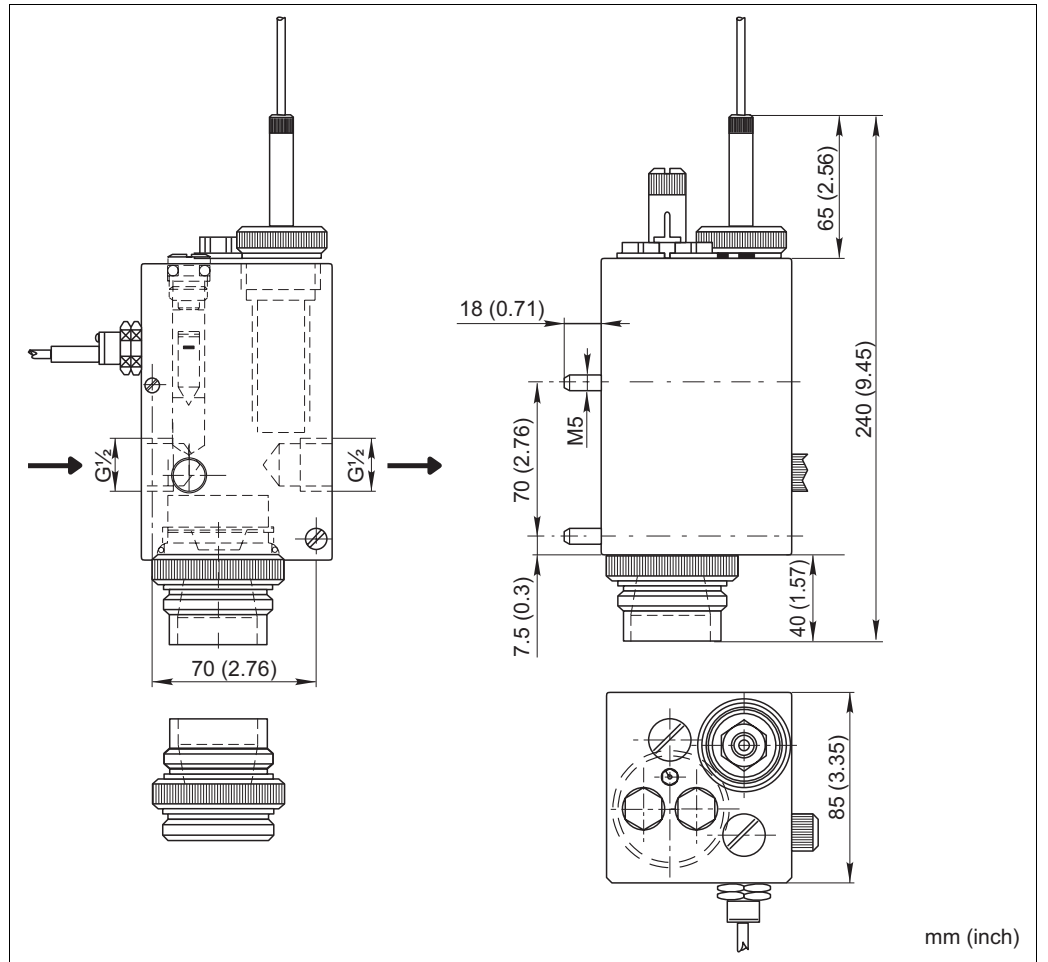


Fig. 5: Dimensions

|                           |   |
|---------------------------|---|
| <b>Weight</b>             | 0.5 to 0.8 kg (1.1 to 1.8 lbs), depending on process connection   |
| <b>Materials</b>          | In contact with medium: <ul style="list-style-type: none"> <li>■ Assembly body: PMMA</li> <li>■ Mounting parts: PVC, stainless steel 1.4571 (AISI 316 Ti), EPDM</li> </ul>  |
| <b>Process connection</b> | G $\frac{1}{2}$   |
| <b>Suitable sensors</b>   | <ul style="list-style-type: none"> <li>■ Chlorine sensors:<br/>Chlorine or Chlorine dioxide sensors with Ø25 mm (0.98 inch) and shaft length up to 80 mm (3.15 inch)</li> <li>■ pH/ORP sensors:<br/>Glass electrodes with Pg 13.5 thread and shaft length 120 mm (4.72 inch)</li> </ul> |

## Ordering information

### Product structure

| Process connection |               |
|--------------------|---------------|
| A                  | none          |
| B                  | 2x NV 1/2"    |
| C                  | 2x D 6/12     |
| D                  | D 6/12 + D 16 |

| Proximity switch |                                 |
|------------------|---------------------------------|
| 0                | none                            |
| 1                | with inductive proximity switch |

|         |  |  |                     |
|---------|--|--|---------------------|
| CCA250- |  |  | complete order code |
|---------|--|--|---------------------|

### Scope of delivery

The scope of delivery comprises:

- Flowfit assembly (ordered version)
- Operating Instructions (English)

## Accessories



Note!

In the following sections, you find the accessories available at the time of issue of this documentation. For information on accessories that are not listed here, please contact your responsible service.

### Accessories kits

NV 1/2

- 2 PVC nipples for connection to PVC pipework
- for pipes with OD 16 mm (0.63 inch)
- order no. 50003228

SV 1/2

- 2 PVC nipples
- different adapters for hose connection
  - with Ø 6/12 mm (0.24/0.47 inch) inlet and Ø 16 mm (0.63 inch) outlet
  - order no. 50003232
- identical adapters
  - for hose connection with Ø 6/12 mm (0.24/0.47 inch) inlet and outlet
  - order no. 50003230

### Sensors

CCS120

- Membrane covered amperometric sensor for total chlorine
- Measuring range 0.1 to 10 mg/l
- Ordering acc. to product structure, see Technical Information (TI388C/07/en)

CCS140

- Membrane covered amperometric sensor for free chlorine
- Measuring range 0.05 to 20 mg/l
- Ordering acc. to product structure, see Technical Information (TI058C/07/en)

CCS141

- Membrane covered amperometric trace sensor for free chlorine
- Measuring range 0.01 to 5 mg/l
- Ordering acc. to product structure, see Technical Information (TI058C/07/en)

CCS142D

- Membrane covered amperometric sensor for free chlorine
- Memosens technology
- Measuring range 0.001 to 50 mg/l
- Ordering acc. to product structure, see Technical Information (TI419C/07/en)

CCS240

- Membrane covered amperometric sensor for chlorine dioxide
- Measuring range 0.05 to 20 mg/l
- Ordering acc. to product structure, see Technical Information (TI114C/07/en)

CCS241

- Membrane covered amperometric trace sensor for chlorine dioxide
- Measuring range 0.01 to 5 mg/l
- Ordering acc. to product structure, see Technical Information (TI114C/07/en)

Orbisint CPS11/11D

- pH electrode for process applications with dirt-repellent PTFE diaphragm
- Optional Memosens technology (CPS11D)
- Ordering acc. to product structure, see Technical Information (TI028C/07/en)

Ceragel CPS71/CPS71D

- pH electrode with double junction reference system and integrated bridge electrolyte
- Optional with Memosens technology (CPS71D)
- Ordering acc. to product structure, see Technical Information (TI245C/07/en)

Ceragel CPS72/CPS72D

- Redox sensor with double junction reference system and integrated bridge electrolyte
- Optional with Memosens technology (CPS72D)
- Ordering acc. to product structure, see Technical Information (TI374C/07/de)

---

## Instruments International

Endress+Hauser  
Instruments International AG  
Kaegenstrasse 2  
4153 Reinach  
Switzerland

Tel.+41 61 715 81 00  
Fax+41 61 715 25 00  
[www.endress.com](http://www.endress.com)  
[info@ii.endress.com](mailto:info@ii.endress.com)

**Endress+Hauser**   
People for Process Automation