

**Features**

- 1-channel isolated barrier
- 24 V DC supply (loop powered)
- Current input/output 4 mA ... 20 mA
- HART I/P or transmitter power supply
- Low voltage drop
- Line fault detection (LFD)
- Up to SIL2 acc. to IEC 61508

**Function**


This isolated barrier is used for intrinsic safety applications. It is loop powered and isolates a 4 mA ... 20 mA signal for transmitters and positioners and is HART compatible.

With a noticeably lower power loss compared to active isolator modules, the barriers 5 V drop makes it suitable for transmitter applications with unstable power sources between 20 V DC ... 30 V DC.

Line fault detection of the field circuit is possible if the control loop in the safe area is monitored for overscale or underscale conditions of the 4 mA ... 20 mA range.


The module can also be used for controlling solenoid valves and discrete outputs, such as LEDs. In this case, terminals 8- and 9+ are driven with a 24 V signal.

**Assembly**

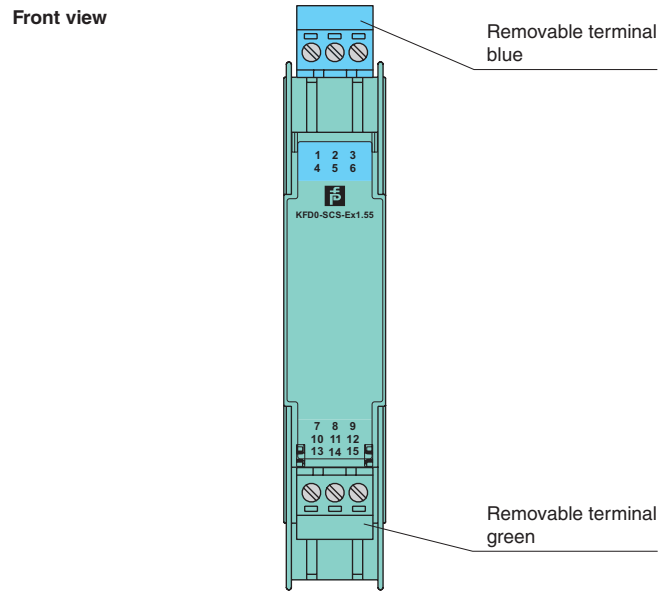

**SIL2**

**Connection**

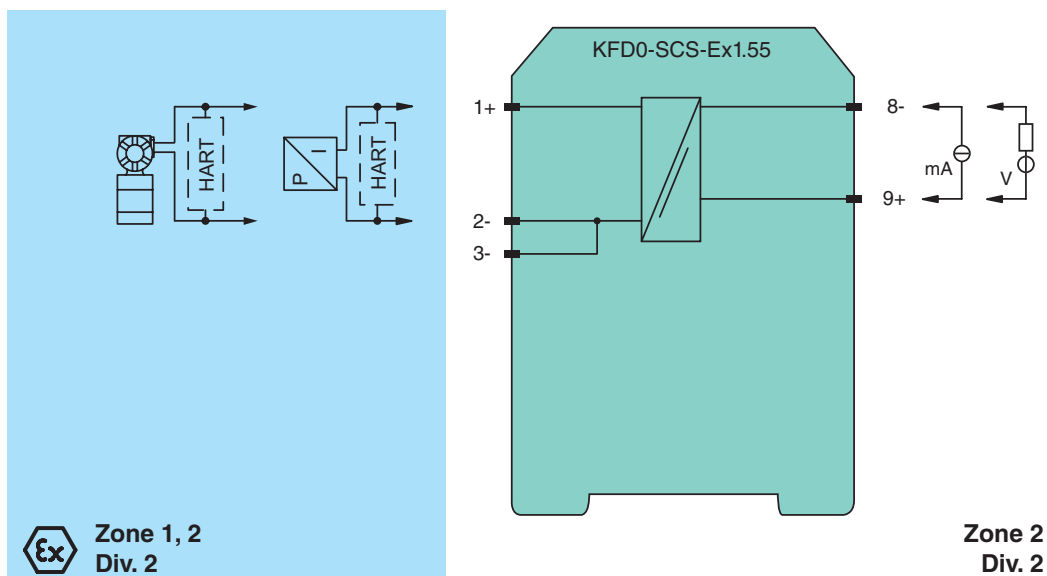

Release date 2013-07-18 15:07 Date of issue 2013-07-18 041655\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

<b>General specifications</b>	
Signal type	Analog output
<b>Supply</b>	
Rated voltage	loop powered
Power loss	0.2 W
<b>Field circuit</b>	
Connection	terminals 1+, 2 / 3-
Available voltage	≥ 16 V for supply voltage > 21 V
Current	4 ... 20 mA (linear transmission 1 ... 22 mA)
Load	≤ 800 Ω (at 20 mA)
<b>Supply circuit</b>	
Connection	terminals 8-, 9+
Voltage	max. 30 V DC
Current	4 ... 20 mA (quiescent current < 0.5 mA)
Power loss	150 mW at 20 mA and $U_E < 24$ V
<b>Transfer characteristics</b>	
Voltage drop	see note
Deviation	
After calibration	≤ ± 80 μA linearity, load and voltage dependence at 20 °C (68 °F)
Influence of ambient temperature	< 0.5 μA/K
Damping	approx. 3 dB
Rise time	≤ 20 μs at 0 Ω, ≤ 600 μs with 800 Ω load
<b>Electrical isolation</b>	
Input/Output	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
<b>Directive conformity</b>	
Electromagnetic compatibility	
Directive 2004/108/EC	EN 61326-1:2006
<b>Conformity</b>	
Electromagnetic compatibility	NE 21:2007
Protection degree	IEC 60529:2001
<b>Ambient conditions</b>	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
<b>Mechanical specifications</b>	
Protection degree	IP20
Mass	approx. 120 g
Dimensions	20 x 124 x 115 mm (0.8 x 4.9 x 4.5 in) , housing type B2
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with Ex-areas</b>	
EC-Type Examination Certificate	PTB 02 ATEX 2064 , for additional certificates see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a>
Group, category, type of protection	⊕ II (2)G [Ex ib] IIC
Voltage $U_o$	23.1 V DC
Current $I_o$	28 mA
Power $P_o$	0.647 W
Supply	
Maximum safe voltage $U_m$	253 V (Attention! The rated voltage can be lower.)
Statement of conformity	
Group, category, type of protection, temperature class	⊕ II 3G Ex nA IIC T4 Gc
Electrical isolation	
Input/Output	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity	
Directive 94/9/EC	EN 60079-0:2009, EN 60079-11:2007 , EN 60079-15:2010
<b>International approvals</b>	
FM approval	device with FM approval on request
<b>General information</b>	
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

Release date 2013-07-18 Date of issue 2013-07-18 041655\_eng.xml


**Additional information**

In addition, the voltage drop across the resistance (load) of the active measurement input must be considered when calculating the field voltage (terminals 1+ and 2-).

Lead breakage monitoring is possible by means of the reaction of the field current signal to the control side, which means the control system must monitor whether the 4 mA ... 20 mA range was exceeded or fallen short of.


SMART repeater supply isolator for **active** interfaces  
Transmitters with or without HART

Voltage drop in case of 20 mA:  
max. 5 V

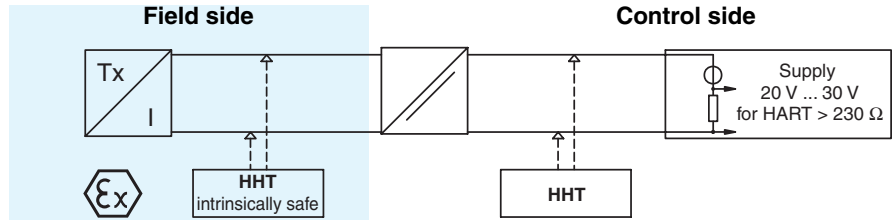

SMART repeater for **passive** interfaces  
Transmitters with or without HART

Voltage drop in case of 20 mA:  
max. 5 V

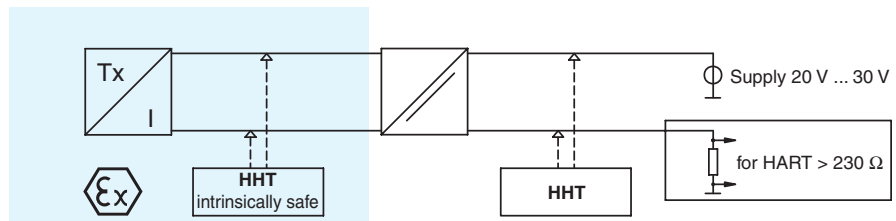

Current driver for positioners, I/P converters  
Positioners with or without HART

Voltage drop in case of 20 mA:  
5 V, 500 Ω ... 800 Ω load  
6 V, 250 Ω load  
8 V, 50 Ω load

